# SYMBOL LEGEND

NOTE: "EX" NEXT TO ANY SYMBOL ON DRAWING DESIGNATES AN EXISTING SIMILAR TYPE DEVICE

| SYMBOL | PART NUMBER | DESCRIPTION | BACK BOX | BACK BOX SUPPLIER | MOUNTING HEIGHT |
|---|---|---|---|---|---|
| FACP | EDGE-ML-G | FIRE ALARM CONTROL PANEL | SUPPLIED | FIRETROL PROTECTION SYSTEMS | APROX. 66" A.F.F. TO TOP |
| ANN | RLCD-C-2 | REMOTE ANNUNCIATOR PANEL | 4" SQUARE 2-1/8" BOX | ELECTRICAL CONTRACTOR | APROX. 60" A.F.F. TO TOP |
| CELL | SLETEVI-CFB | CELLULAR/IP DUAL PATH COMMUNICATOR | SUPPLIED | FIRETROL PROTECTION SYSTEMS | 66" A.F.F. TO TOP |
| DOC | MB3001 | DOCUMENT STORAGE CABINET | SUPPLIED - 14.25" X 14.25" X 3.25" | FIRETROL PROTECTION SYSTEMS | AS REQUIRED - LOCATION VERIFIED BY OWNER |
| | SIGA-OSD | PHOTOELECTRIC SMOKE DETECTOR | 4" OCTAGON 2-1/8" DEEP | ELECTRICAL CONTRACTOR | CEILING |
| | SIGA-278 | MANUAL PULL STATION | 4" SQ. W/ SINGLE GANG RING | ELECTRICAL CONTRACTOR | 48" A.F.F. TO CENTER |
| | SIGA-HRD | FIXED TEMP HEAT DETECTOR | 4" OCTAGON 2-1/8" DEEP | ELECTRICAL CONTRACTOR | CEILING |
| (R) | SIGA-SD | DUCT SMOKE DETECTOR<br>S=SUPPLY R=RETURN FSD=FIRE/SMOKE DAMPER | SUPPLIED | FIRETROL PROTECTION SYSTEMS | DUCT SMOKE DETECTOR INSTALLED BY ELEC. OR MECH. CONTRACTOR (REF SPECS) |
| C | SIGA-CR | PROGRAMMABLE CONTROL RELAY | 4" SQ. W/ SINGLE GANG RING | ELECTRICAL CONTRACTOR | AS REQUIRED |
| SS 120 | E120V-GT | 120VAC SURGE PROTECTION MODULE | 6"x6" BACKBOX | ELECTRICAL CONTRACTOR | AS NEEDED |
| WT | BY OTHERS | WATERFLOW - BY SPRINKLER CONTRACTOR | N/A | N/A | N/A |
| TS | BY OTHERS | TAMPER - BY SPRINKLER CONTRACTOR | N/A | N/A | N/A |
| | GCAVWF | CEILING MOUNT LED HORN STROBE (WHITE) | 4" SQUARE 2-1/8" DEEP BOX | ELECTRICAL CONTRACTOR | CEILING |
| WP | WGAVWF | WALL MOUNT HORN STROBE (OUTDOOR) | 2 GANG WEATHERPROOF BELL BOX | ELECTRICAL CONTRACTOR | 84" A.F.F. TO BOTTOM |
| | GCVWF | CEILING MOUNT LED STROBE (WHITE) | 4" SQUARE 2-1/8" DEEP BOX | ELECTRICAL CONTRACTOR | CEILING |
| xxΩ | RESISTOR | EOL RESISTOR - xx DESIGNATES OHM RATING | N/A | N/A | ON THE BACK OF THE END OF LINE DEVICE |
| M2 | SIGA-CT2 | DUAL MONITOR MODULE | 4" SQ. W/ SINGLE GANG RING | ELECTRICAL CONTRACTOR | AS REQUIRED |

# WIRE LEGEND

| | |
|---|---|
| ——— | "A" = GREEN FPLP 18AWG 2COND. SIGNALING-LINE CIRCUIT |
| —— – —— | "B" = RED FPLP 14AWG 2 COND. NOTIFICATION APPLIANCE CIRCUIT |
| —— · —— · —— | "E" = WHITE FPLP 16AWG 4COND. RS485(SBUS) COMMUNICATIONS & POWER CIRCUIT |
| ▬▬▬ | 3/4" CONDUIT UNLESS OTHERWISE NOTED ON DRAWINGS —○— 1A = WIRE TYPE WITHIN CONDUIT |
| ▪▪▪▪▪▪▪▪▪▪ | 3/4" UNDERGROUND CONDUIT UNLESS OTHERWISE NOTED ON DRAWINGS —○— 1A = WIRE TYPE WITHIN CONDUIT |

# HATCH LEGEND

| | |
|---|---|
| ▨ = | NOT IN SCOPE OF WORK - ALL EQUIPMENT IN THESE AREAS ARE EXISTING UNLESS OTHERWISE NOTED. |
| □ = | SCOPE OF WORK - ALL EQUIPMENT SHOWN IN THESE AREAS ARE NEW UNLESS OTHERWISE NOTED. |

# RISER LEGEND


| | |
|---|---|
| ○ | RISER UP |
| ● | RISER DOWN |
| ◑ | RISER UP AND DOWN |

*RISER CONDUITS ARE TYPICALLY 1" UNLESS OTHERWISE NOTED ON DRAWINGS

# DRAWING INDEX


| | |
|---|---|
| FA1.00 | SYMBOL LEGEND, WIRE LEGEND, GENERAL NOTES, FIRE ALARM RISER AND DESIGN CRITERIA |
| FA1.01 | LEVEL 1 AND 2 FIRE ALARM LAYOUT |


# CIRCUIT NOTATION

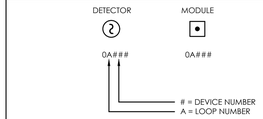



TYPICAL EDGE PANEL ADDRESSING

| EDGE | | |
|---|---|---|
| LOOP1 | 01001 - 125 | DETECTORS |
| | 01126 - 250 | MODULES |
| LOOP2* | 02251 - 375 | DETECTORS |
| | 02376 - 500 | MODULES |

*EXPANDABLE TO 1000 DETECTORS AND MODULES UTILIZING ID-DC1(2) SLC EXPANSION MODULE


| Fire Alarm Function Matrix | Outputs or Actions | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| Input Description | Activate visual & audible Alarm indicators on FACP and initiate alarm signal to Central Station | Activate visual & audible Trouble indicators on FACP and initiate Trouble signal to Central Station | Activate visual & audible Supervisory indicators on FACP and initiate Supervisory signal to Central Station | Existing Building Sprinkler Monitoring Panel Alarm | Activate Horn/Strobes Throughout the Building | Activate Dry Contacts to Shutdown HVAC Unit | Activate Dry Contacts to Initiate Primary Elevator Recall | Activate Dry Contacts to Initiate Alternate Elevator Recall | Activate Dry Contacts to Light the Elevator Cab "FIRE" light. | Activate Dry Contacts to Release Door Holders |
| Any System Smoke Detector | ● | | | | ● | ● | | | | ● |
| Any System Heat Detector | ● | | | | ● | | | | | ● |
| Ground Floor Elevator Lobby Smoke Detector | ● | | | | ● | | | ● | | ● |
| Elevator Lobby Smoke Detector 2nd Floor ⚠ | ● | | | | ● | | ● | | | |
| Elevator Machine Room Smoke Detector | ● | | | | ● | | | ● | ● | |
| Top of Elevator Shaft Smoke Detector | ● | | | | ● | | ● | | ● | ● |
| Bottom Elevator Shaft Heat Detector | ● | | | | ● | | | | | ● |
| Manual Pull Station | ● | | | | ● | | | | | ● |
| Sprinkler Valve Tamper Switch | | | ● | | | | | | | ● |
| Sprinkler Valve Waterflow Switch | ● | | | ● | ● | | | | | ● |
| Broken Wire on any F/A Circuit (ckt open) | | ● | | | | | | | | |
| Ground Fault on any F/A Circuit | | ● | | | | | | | | |
| Short on any F/A Circuit | | ● | | | | | | | | |
| Loss of Communications to any intelligent F/A Device | | ● | | | | | | | | |
| Loss of supervision on any circuit supervised by an intelligent F/A device. | | ● | | | | | | | | |
| Sensitivity/Maintenance Issue w/ Any Intelligent Sensor | | | ● | | | | | | | |

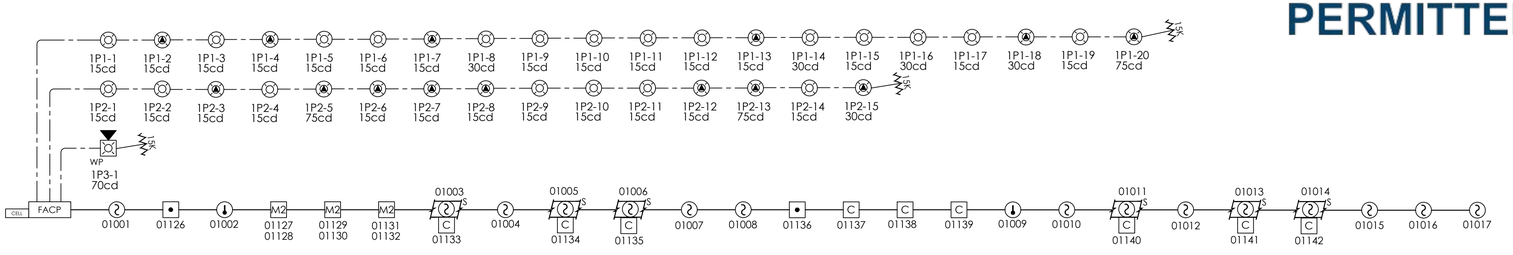



1 FIRE ALARM RISER

NOT TO SCALE

# KEY PLAN



# CIRCUIT NOTATION

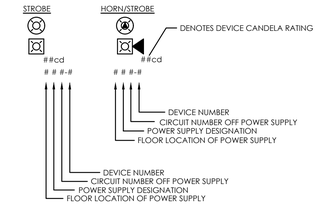


GEORGETOWN TEXAS

Plans appear to be in compliance, however, compliance with all adopted codes & ordinances shall be inspected in the field regardless of information shown on permitted set of drawings.

GEORGETOWN TEXAS

PERMITTED

# GENERAL NOTES

1. ALL DEVICES LOCATIONS SHOWN ARE BASED ON NFPA 72 OR ARE THE DESIGN CONCEPT OF THE ENGINEER OF RECORD. DO NOT DEVIATE FROM LOCATIONS SHOWN WITHOUT WRITTEN DIRECTION FROM FIRETROL. ANY DEVIATION WITHOUT WRITTEN DIRECTION MAY CAUSE THE SYSTEM TO BE NON-COMPLIANT.
2. 120VAC DEDICATED BRANCH CIRCUIT(S) AND CONNECTIONS SHALL BE PROTECTED AGAINST PHYSICAL DAMAGE. CIRCUIT DISCONNECT SHALL HAVE A RED MARKING, SHALL BE ACCESSIBLE ONLY TO AUTHORIZED PERSONNEL, AND SHALL BE IDENTIFIED AS "FIRE ALARM CIRCUIT" (NFPA 72, 2019) DEDICATED BRANCH CIRCUIT REQUIRED AT FIRE ALARM CONTROL PANEL AND BOOSTER PANELS.
3. ALL FIRE ALARM CIRCUITS ARE TO BE FREE OF GROUNDS AND SHORTS.
4. APPROPRIATE END OF LINE VALUE SHOULD BE READ PER CIRCUIT AT FACP.
5. USE NFPA 70 ARTICLE 760 FOR ALL FIRE ALARM WIRING.
6. FOLLOW ALL NATIONAL AND LOCAL CODES FOR MOUNTING AND INSTALLING DEVICES.
7. **WHERE DETECTORS ARE INSTALLED FOR SIGNAL INITIATION DURING CONSTRUCTION, THEY SHALL BE CLEANED AND VERIFIED TO BE OPERATING IN ACCORDANCE WITH THE LISTED SENSITIVITY, OR THEY SHALL BE REPLACED PRIOR TO THE FINAL ACCEPTANCE TEST OF THE SYSTEM - NFPA 72, 2019 EDITION, SECTION 17.7.1.12.1**
8. **WHERE DETECTORS ARE INSTALLED BUT NOT OPERATIONAL DURING CONSTRUCTION, THEY SHALL BE PROTECTED FROM CONSTRUCTION DEBRIS, DUST, DIRT AND DAMAGE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND VERIFIED TO BE OPERATING IN ACCORDANCE WITH THE LISTED SENSITIVITY, OR THEY SHALL BE REPLACED PRIOR TO THE FINAL ACCEPTANCE TEST OF THE SYSTEM - NFPA 72, 2019 EDITION, SECTION 17.7.1.12.2**
9. AUXILIARY RELAYS TO INITIATE CONTROL OF FIRE SAFETY FUNCTIONS SHALL BE LOCATED WITHIN 3 FEET OF THE CONTROLLED CIRCUIT OR DEVICE.
10. ALL CONDUIT AND CONDUIT STUBS MUST BE 3/4" UNLESS OTHERWISE NOTED ON DRAWINGS.
11. ALL CEILING HEIGHTS WHERE CEILING MOUNTED DEVICES ARE SHOWN, ARE 10 FEET ABOVE FINISHED FLOOR OR LESS UNLESS OTHERWISE NOTED ON DRAWINGS.
12. DUCT DETECTOR TUBES SHALL EXTEND ACROSS THE WIDTH OF THE DUCT AND PROTRUDE THROUGH THE OPPOSITE SIDE; AND BE PROVIDED WITH A REMOVABLE PLUG AT THE END OF THE SAMPLING TUBE.
13. CONCEALED DUCT DETECTORS SHALL BE PROVIDED WITH A PERMANENT LABEL LOCATED ON THE CEILING BELOW THE DETECTOR OR ON THE FLOOR ABOVE THE DETECTOR. THE LABEL SHALL HAVE THE DEVICE DESCRIPTION AND IDENTIFICATION ADDRESS.

# APPLICABLE CODES

PROJECT IS DESIGNED IN COMPLIANCE WITH THE 2021INTERNATIONAL BUILDING CODE.

| | |
|---|---|
| FIRE | 2021 IFC |
| BUILDING | 2021 IBC |
| MECHANICAL | 2021 IMC |
| ELECTRICAL | 2020 NEC |
| NFPA72 | 2019 EDITION |
| CONSTRUCTION TYPE | 1B, FULLY SPRINKLERED |
| OCCUPANCY | GROUP B BUSINESS |

# SCOPE OF WORK

FIRETROL IS TO PROVIDE A NEW FULL FIRE ALARM SYSTEM. IN ACCORDANCE WITH NFPA 72 AND ALL APPLICABLE STANDARDS.


IMPORTANT

This drawing and the information and design application herein contained is the property of Firetrol Protection Systems, inc. and/or its subsidiaries and is loaned under the expressed conditions that the same be returned to Firetrol Protection Systems, Inc. upon request; all information herein contained shall be treated as secret and confidential; no reproduction of this drawing or any part thereof shall be made without the expressed written consent of Firetrol Protection Systems, Inc.


| REV. | REVISIONS | DATE |
|---|---|---|
| 1 | AHJ COMMENTS | 04-01-26 |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |

☑ FOR SUBMITTAL ☐ RECORD DRAWINGS

I have reviewed these plans and

☑ certify that they comply with the applicable codes and standards.

Or

☐ certify they were copied from sealed engineering plans and any violations of the applicable codes or standards are specifically noted on these plans.


**Firetrol Protection Systems, Inc.**
4616 W. Howard Lane Suite 700
Austin, Texas 78728

APS Licensee Signature - License # APS-2129093

DAN FELDMAN 04-01-2026
APS Tester name Date



FIRETROL | Protection Systems
FIRE PROTECTION AND LIFE SAFETY SPECIALISTS
SCR-0292 ACR-1751168
AUSTIN OFFICE
4616 W. Howard Lane Suite 700
Austin, Texas 78728
call (512) 687-0115 • fax (512) 687-0120
www.firetrol.net
Austin•Beaumont•Corpus Christi•Dallas•Fort Worth•Houston•La Porte•Lubbock•Mobile•Oklahoma City•Phoenix
Salt Lake City•San Antonio•Tucson•Tampa•Upper Valley•Waco


PROJECT: FROST BANK - GEORGETOWN
2208 WOLF RANCH PKWY
GEORGETOWN, TX 78628

CONTRACT WITH: BIG STATE ELECTRIC
2431 FORBES DRIVE
AUSTIN, TX 78754

NEW GROUND UP CONSTRUCTION

DRAWING TITLE: FIRE ALARM SYSTEM

| CONTRACT NUMBER: | PERMIT NUMBER: |
|---|---|
| 47-005408 | xx |
| DATE: | DRAWN BY: |
| 2-17-2026 | MN |
| AHJ: | CHECKED BY: |
| GFD | DF |

**Sheet Number**
1 of 2


**Sheet Name**
FA1.00
COVER SHEET
FIRE ALARM SYSTEM

GEORGETOWN
TEXAS

Plans appear to be in compliance, however, compliance with all adopted codes & ordinances shall be inspected in the field regardless of information shown on permitted set of drawings.

GEORGETOWN
TEXAS


**PERMITTED**

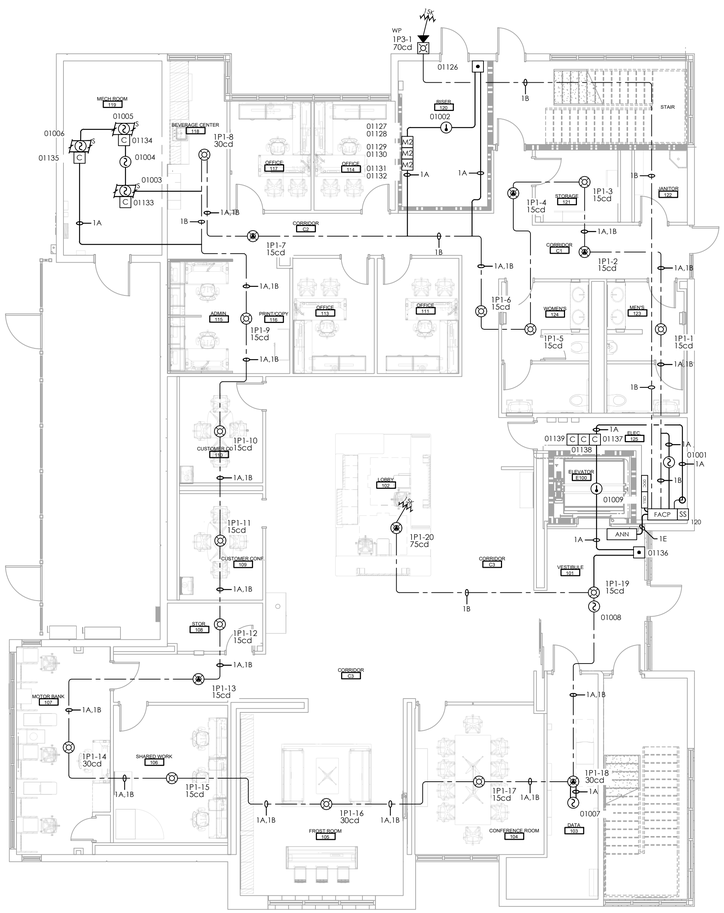


## 2 LEVEL 1 FIRE ALARM LAYOUT

0' 4' 8' 16'

1/8" = 1'-0"

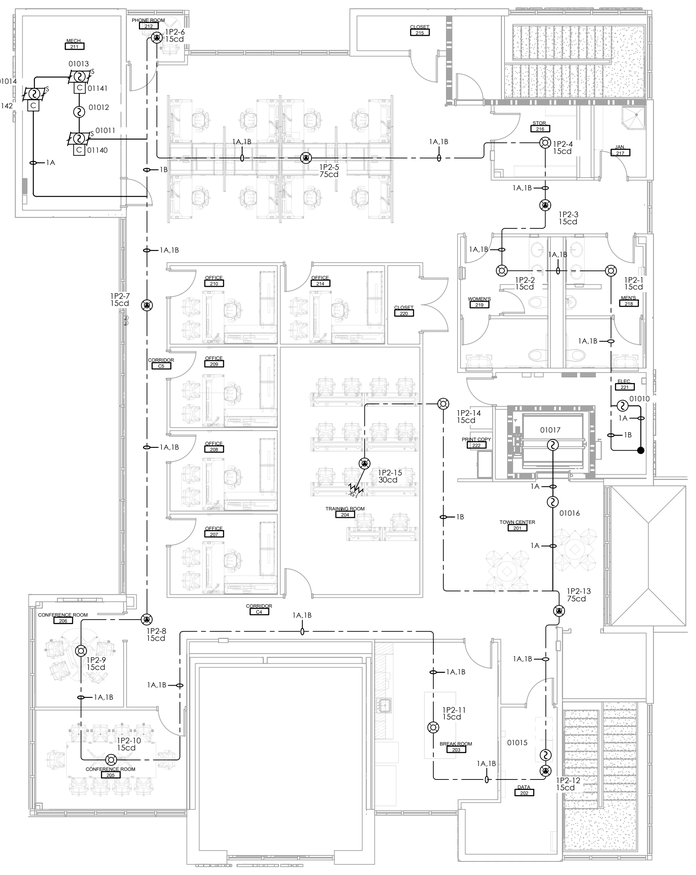


## 3 LEVEL 2 FIRE ALARM LAYOUT

0' 4' 8' 16'

1/8" = 1'-0"


IMPORTANT
This drawing and the information and design application herein contained is the property of Firetrol Protection Systems, inc. and/or its subsidiaries and is loaned under the expressed conditions that the same be returned to Firetrol Protection Systems, Inc. upon request; all information herein contained shall be treated as secret and confidential; no reproduction of this drawing or any part thereof shall be made without the expressed written consent of Firetrol Protection Systems, Inc.


| REV. | REVISIONS | DATE |
|---|---|---|
| 1 | AHJ COMMENTS | 04-01-26 |
| 2 | | |
| 3 | | |
| 4 | | |
| 5 | | |

☑ FOR SUBMITTAL ☐ RECORD DRAWINGS

I have reviewed these plans and

☑ certify that they comply with the applicable codes and standards.

Or

☐ certify they were copied from sealed engineering plans and any violations of the applicable codes or standards are specifically noted on these plans.


**Firetrol Protection Systems, Inc.**
4616 W. Howard Lane Suite 700
Austin, Texas 78728

APS Licensee Signature - APS-21290P3
License #

DAN FELDMAN 04-01-2026
APS Printed name Date



FIRETROL Protection Systems
FIRE PROTECTION AND LIFE SAFETY SPECIALISTS
SCR-0292 ACR-1751168
**AUSTIN OFFICE**
4616 W. Howard Lane Suite 700
Austin, Texas 78728
call (512) 687-0115 • fax (512) 687-0120
www.firetrol.net
Austin•Beaumont•Corpus Christi•Dallas•Fort Worth•Houston•La Porte•Lubbock•Mobile•Oklahoma City•Phoenix
Salt Lake City•San Antonio•Tucson•Tampa•Tyler•Waco


PROJECT:
FROST BANK - GEORGETOWN
2208 WOLF RANCH PKWY
GEORGETOWN, TX 78628

CONTRACT WITH:
BIG STATE ELECTRIC
2431 FORBES DRIVE
AUSTIN, TX 78754

NEW GROUND UP CONSTRUCTION

DRAWING TITLE:
FIRE ALARM SYSTEM

| CONTRACT NUMBER: | PERMIT NUMBER: |
|---|---|
| 47-005408 | xx |
| DATE: 2-17-2026 | DRAWN BY: MN |
| AHJ: AFD | CHECKED BY: DF |

**Sheet Number**
2 of 2

**Sheet Name**
FA1.01
FIRE ALARM LAYOUT
FIRE ALARM SYSTEM