SYMBOL LEGEND

NOTE: "EX" NEXT TO ANY SYMBOL ON DRAWING DESIGNATES AN EXISTING SIMILAR TYPE DEVICE

SYMBOL	PART NUMBER	DESCRIPTION	BACK BOX	BACK BOX SUPPLIER	MOUNTING HEIGHT
FACP	6820 - SK	FIRE ALARM CONTROL PANEL	SUPPLIED	FIRETROL PROTECTION SYSTEMS	APROX. 66" A.F.F. TO TOP
EVS-50	EVS-50	SPEAKER AMP CABINET	SUPPLIED	FIRETROL PROTECTION SYSTEMS	APROX. 66" A.F.F. TO TOP
ANN	5860	REMOTE ANNUNCIATOR PANEL	SUPPLIED	N/A	APROX. 60" A.F.F. TO TOP
RPSXA	HPF-PS6	REMOTE POWER SUPPLY (RED) - 6AMP	SUPPLIED	FIRETROL PROTECTION SYSTEMS	APROX. 66" A.F.F. TO TOP
CELL	SLETEVI-CFB	CELLULAR/IP DUAL PATH COMMUNICATOR	SUPPLIED	FIRETROL PROTECTION SYSTEMS	66" A.F.F. TO TOP
DOC	MB3001	DOCUMENT STORAGE CABINET	SUPPLIED - 14.25" X 14.25" X 3.25"	FIRETROL PROTECTION SYSTEMS	AS REQUIRED - LOCATION VERIFIED BY OWNER
M1 S	SK-CONTROL	NOTIFICATION MODULE	4" SQUARE 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	AS REQUIRED
SB	SK-FIRE-CO WITH B200-S	PHOTOELECTRIC SMOKE/CO DETECTOR AN AUDIBLE (SOUNDER) BASE	4" SQUARE 2-1/8" DEEP BOX WITH EXTENSION RING	ELECTRICAL CONTRACTOR	CEILING
	SK-PHOTO-W	PHOTOELECTRIC SMOKE/CO DETECTOR	4" SQUARE	ELECTRICAL CONTRACTOR	CEILING
	SK-PULL-DA	DOUBLE-ACTION MANUAL PULL STATION	4" SQUARE	ELECTRICAL CONTRACTOR	48" A.F.F. TO CENTER
	SK-HEAT-HT	HIGH TEMP HEAT DETECTOR (135° - 190°)	4" OCTAGON 2-1/8" DEEP	ELECTRICAL CONTRACTOR	CEILING
(R)	SK-DUCT	DUCT SMOKE DETECTOR S=SUPPLY R=RETURN FSD=FIRE/SMOKE DAMPER	SUPPLIED	FIRETROL PROTECTION SYSTEMS	DUCT SMOKE DETECTOR INSTALLED BY ELEC. OR MECH. CONTRACTOR (REF SPECS)
RT	RTS151	REMOTE TEST STATION (MAGNETIC)	SINGLE GANG BOX	ELECTRICAL CONTRACTOR	48" A.F.F. TO CENTER
C	SK-RELAY	PROGRAMMABLE CONTROL RELAY	4" SQ. 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	AS REQUIRED
M1	SK-MONITOR	SINGLE MONITOR MODULE	4" SQUARE	ELECTRICAL CONTRACTOR	AS REQUIRED
M2	SK-MONITOR-2	DUAL MONITOR MODULE	4" SQUARE 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	AS REQUIRED
IM	SK-ISO	ISOLATION MODULE FOR SLC CIRCUIT	4" SQUARE 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	AS REQUIRED
SS 120	E120V-GT	120VAC SURGE PROTECTION MODULE	6"x6" BACKBOX	ELECTRICAL CONTRACTOR	AS NEEDED
SS SLC	SLCP-30(w/ PCB1B)	SLC SURGE PROTECTION MODULE	6"x6" BACKBOX	ELECTRICAL CONTRACTOR	AS NEEDED
SS SPK	PHC-043(w/PCB1B)	SPK SURGE PROTECTION MODULE	6"x6" BACKBOX	ELECTRICAL CONTRACTOR	AS NEEDED
	SPSWLED	WALL MOUNT SPEAKER STROBE	4" SQUARE 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	84" A.F.F. TO BOTTOM
WP	SPSKWLED	WEATHERPROOF WALL MOUNT SPEAKER STROBE	4" SQUARE 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	84" A.F.F. TO BOTTOM
	SPSCWLED	CEILING MOUNT SPEAKER STROBE (w/ FIRE MARKINGS)	4" SQUARE 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	CEILING
WP	SPSCKWLED	WEATHERPROOF CEILING MOUNT SPEAKER STROBE (w/ FIRE MARKINGS)	4" SQUARE 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	CEILING
SP	SPCWL	CEILING MOUNT SPEAKER	4" SQUARE 2-1/2" DEEP BOX	ELECTRICAL CONTRACTOR	CEILING
	SCWLED	CEILING MOUNT STROBE (w/ FIRE MARKING)	4" SQUARE 2-1/8" DEEP BOX	ELECTRICAL CONTRACTOR	CEILING
	MBA-10-24	10" WEATHERPROOF BELL	BBK-1 WEATHERPROOF BOX	FIRETROL PROTECTION SYSTEMS	96" ABOVE CENTER OF F.D.C.
	RESISTOR	EOL RESISTOR - xx DESIGNATES OHM RATING	N/A	N/A	ON THE BACK OF THE END OF LINE DEVICE

WIRE LEGEND

———	"A" = GREEN FPLP 18AWG 2COND. SIGNALING-LINE CIRCUIT
—— – ——	"B" = RED FPLP 14AWG 2 COND. NOTIFICATION APPLIANCE CIRCUIT
- - - - - - - - -	"C" = WHITE FPLP 16AWG 2COND. NON-SHIELDED SPEAKER CIRCUIT
— ·· — ·· —	"E" = WHITE FPLP 16AWG 4COND. RS485(SBUS) COMMUNICATIONS & POWER CIRCUIT
— — — —	"G" = (COLOR TBD) FPLP 14AWG 2COND. 24VDC POWER FSD'S & DOOR HOLDERS - POWER LIMITED
———	"L" = GREEN FPLP 18AWG 2COND. INITIATING DEVICE CIRCUIT
▬▬▬	3/4" CONDUIT UNLESS OTHERWISE NOTED ON DRAWINGS — 1A = WIRE TYPE WITHIN CONDUIT
▪▪▪▪▪▪▪▪▪▪	3/4" UNDERGROUND CONDUIT UNLESS OTHERWISE NOTED ON DRAWINGS — 1A = WIRE TYPE WITHIN CONDUIT

FIRE ALARM SEQUENCE OF OPERATION


SYSTEM OUTPUTS

		FACP ANNUNCIATION							NOTIFICATION						SUPPLEMENTARY		
		A: FACP REMOTE ANNUNCIATOR ALARM INDICATION	B: FACP REMOTE ANNUNCIATOR TROUBLE INDICATION	C: FACP REMOTE ANNUNCIATOR SUPERVISORY INDICATION	D: GPS-SIGS MONITORING ALARM REPORT	E: GPS-SIGS MONITORING TROUBLE REPORT	F: GPS-SIGS MONITORING SUPERVISORY REPORT	G:	H: ACTIVATE REGIA NOTIFICATION APPLIANCES	I: ACTIVATE AUDIBLE NOTIFICATION APPLIANCES	K: ACTIVATE AUDIBLE EVACUATION APPLIANCES	L: ACTIVATE EVACUATION BELL AT INSPECTOR'S RISER	M:	N: HVAC AUDIO SYSTEM	O: HVAC SHUTDOWN (DETECTOR AND SPRINKLER)	P:	
SYSTEM INPUTS		A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	
1	MANUAL PULL STATIONS	●			●				●	●				●			1
2	AREA SMOKE DETECTORS	●			●				●	●				●			2
3	AREA HEAT DETECTORS	●			●				●	●				●			3
4																	4
5	DUCT SMOKE DETECTORS			●		●									●		5
6	CARBON MONOXIDE DETECTORS			●		●						●					6
7																	7
8	BDA SYSTEM - OFF NORMAL			●		●											8
9																	9
10																	10
11																	11
12	WET SPRINKLER WATER FLOW SWITCH	●			●				●	●	●			●			12
13	SPRINKLER SUPERVISORY (TAMPER) SWITCH			●		●											13
14	FIRE PUMP RUN			●		●											14
15	FIRE PUMP LOSS OF POWER			●		●											15
16	FIRE PUMP PHASE REVERSAL			●		●											16
17	WATER TANK LEVEL - OFF NORMAL			●		●											17
18																	18
19	LOSS OF AC POWER FAILURE		●			●											19
20	FIRE ALARM LOW BATTERY		●			●											20
21	BROKEN WIRE ON FIRE ALARM CIRCUIT		●			●											21
22	GROUND FAULT ON FIRE ALARM CIRCUIT		●			●											22
23	SHORT CIRCUIT ON FIRE ALARM CIRCUIT		●			●											23
24	LOSS OF COMMUNICATIONS TO FIRE ALARM DEVICES		●			●											24
25	SENSITIVITY / MAINTENANCE ISSUES WITH DETECTORS		●			●											25
		A	B	C	D	E	F	G	H	I	K	L	M	N	O	P	

DRAWING INDEX

FA1.00	SYMBOL LEGEND, WIRE LEGEND, GENERAL NOTES, AND DESIGN CRITERIA
FA1.01	AREA A FIRE ALARM SYSTEM
FA1.02	AREA B FIRE ALARM SYSTEM
FA1.03	AREA C FIRE ALARM SYSTEM
FA1.04	AREA D FIRE ALARM SYSTEM AND RISER DIAGRAM


CIRCUIT NOTATION

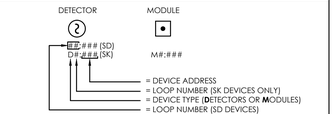


TYPICAL SILENT KNIGHT 6820 PANEL ADDRESSING

SK DEVICES		SD DEVICES	
LOOP1	97:S001 - 159 DETECTORS 97:M001 - 159 MODULES	LOOP1	97:P001 - 127 DETECTORS & MODULES
LOOP2	01:S001 - 159 DETECTORS 01:M001 - 159 MODULES	LOOP2	01:P001 - 127 DETECTORS & MODULES
		LOOP3	02:P001 - 127 DETECTORS & MODULES
		LOOP4	03:P001 - 127 DETECTORS & MODULES
EXPANDABLE TO 555 DETECTORS AND 555 MODULES UTILIZING 6815 SLC EXPANDER (3 TOTAL)		EXPANDABLE TO 635 DETECTORS AND MODULES UTILIZING 381.5XL SLC EXPANDER (4 TOTAL)	

CIRCUIT NOTATION

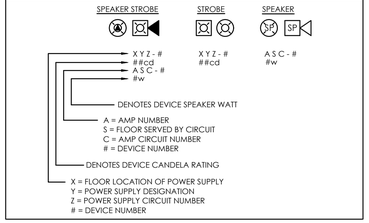

KEY PLAN

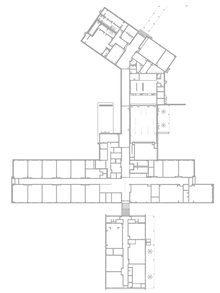

DRAWING NOTES

1. MODULES TO MONITOR BDA SYSTEM. FIELD VERIFY LOCATION.
2. MODULES TO MONITOR FIRE SPRINKLER SYSTEM AND FIRE PUMP.
3. SURGE SUPPRESSORS FOR UNDERGROUND TO BLDG D. SLC AND SPEAKER.
4. RELAY TO SHUTDOWN SPEAKER SYSTEM ON ALARM.
5. MODULES TO MONITOR SPRINKLER PUMP TANK.

GENERAL NOTES

1. ALL DEVICES LOCATIONS SHOWN ARE BASED ON NFPA 72 OR ARE THE DESIGN CONCEPT OF THE ENGINEER OF RECORD. DO NOT DEVIATE FROM LOCATIONS SHOWN WITHOUT WRITTEN DIRECTION FROM FIRETROL. ANY DEVIATION WITHOUT WRITTEN DIRECTION MAY CAUSE THE SYSTEM TO BE NON-COMPLIANT.
2. 120VAC DEDICATED BRANCH CIRCUIT(S) AND CONNECTIONS SHALL BE PROTECTED AGAINST PHYSICAL DAMAGE. CIRCUIT DISCONNECT SHALL HAVE A RED MARKING, SHALL BE ACCESSIBLE ONLY TO AUTHORIZED PERSONNEL, AND SHALL BE IDENTIFIED AS "FIRE ALARM CIRCUIT" (NFPA 72, 2016) DEDICATED BRANCH CIRCUIT REQUIRED AT FIRE ALARM CONTROL PANEL AND BOOSTER PANELS.
3. ALL FIRE ALARM CIRCUITS ARE TO BE FREE OF GROUNDS AND SHORTS.
4. APPROPRIATE END OF LINE VALUE SHOULD BE READ PER CIRCUIT AT FACP.
5. USE NFPA 70 ARTICLE 760 FOR ALL FIRE ALARM WIRING.
6. FOLLOW ALL NATIONAL AND LOCAL CODES FOR MOUNTING AND INSTALLING DEVICES.
7. **WHERE DETECTORS ARE INSTALLED FOR SIGNAL INITIATION DURING CONSTRUCTION, THEY SHALL BE CLEANED AND VERIFIED TO BE OPERATING IN ACCORDANCE WITH THE LISTED SENSITIVITY, OR THEY SHALL BE REPLACED PRIOR TO THE FINAL ACCEPTANCE TEST OF THE SYSTEM - NFPA 72, 2016 EDITION, SECTION 17.7.1.11.1**
8. **WHERE DETECTORS ARE INSTALLED BUT NOT OPERATIONAL DURING CONSTRUCTION, THEY SHALL BE PROTECTED FROM CONSTRUCTION DEBRIS, DUST, DIRT AND DAMAGE IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS AND VERIFIED TO BE OPERATING IN ACCORDANCE WITH THE LISTED SENSITIVITY, OR THEY SHALL BE REPLACED PRIOR TO THE FINAL ACCEPTANCE TEST OF THE SYSTEM - NFPA 72, 2016 EDITION, SECTION 17.7.1.11.2**
9. AUXILIARY RELAYS TO INITIATE CONTROL OF FIRE SAFETY FUNCTIONS SHALL BE LOCATED WITHIN 3 FEET OF THE CONTROLLED CIRCUIT OR DEVICE.
10. ALL CONDUIT AND CONDUIT STUBS MUST BE 3/4" UNLESS OTHERWISE NOTED ON DRAWINGS.
11. ALL CEILING HEIGHTS WHERE CEILING MOUNTED DEVICES ARE SHOWN, ARE 10 FEET ABOVE FINISHED FLOOR OR LESS UNLESS OTHERWISE NOTED ON DRAWINGS.
12. DUCT DETECTOR TUBES SHALL EXTEND ACROSS THE WIDTH OF THE DUCT AND PROTRUDE THROUGH THE OPPOSITE SIDE; AND BE PROVIDED WITH A REMOVABLE PLUG AT THE END OF THE SAMPLING TUBE.
13. CONCEALED DUCT DETECTORS SHALL BE PROVIDED WITH A PERMANENT LABEL LOCATED ON THE CEILING BELOW THE DETECTOR OR ON THE FLOOR ABOVE THE DETECTOR. THE LABEL SHALL HAVE THE DEVICE DESCRIPTION AND IDENTIFICATION ADDRESS.

APPLICABLE CODES

PROJECT IS DESIGNED IN COMPLIANCE WITH THE 2018 NTERNATIONAL BUILDING CODE.

FIRE	2018 IFC
BUILDING	2018 IBC
MECHANICAL	2018 IMC
ELECTRICAL	2017 NEC
NFPA72	2016 EDITION
CONSTRUCTION TYPE	II-B, FULLY SPRINKLERED
OCCUPANCY	GROUP E EDUCATION

SCOPE OF WORK

NEW GROUND UP HIGH SCHOOL BUILDING WITH VOICE EVACUATION.

ALL WORK SHALL BE IN ACCORDANCE WITH NFPA 72.

IMPORTANT

This drawing and the information and design application herein contained is the property of Firetrol Protection Systems, inc. and/or its subsidiaries and is loaned under the expressed conditions that the same be returned to Firetrol Protection Systems, Inc. upon request; all information herein contained shall be treated as secret and confidential; no reproduction of this drawing or any part thereof shall be made without the expressed written consent of Firetrol Protection Systems, Inc.

REV.	REVISIONS	DATE
1		
2		
3		
4		
5		

☑ FOR SUBMITTAL ☐ RECORD DRAWINGS

I have reviewed these plans and

☑ certify that they comply with the applicable codes and standards.

Or

☐ certify they were copied from sealed engineering plans and any violations of the applicable codes or standards are specifically noted on these plans.

Firetrol Protection Systems, Inc.
4616 W. Howard Lane Suite 700
Austin, Texas 78728
Phone: 512-687-0115 ACR-1751168

APS Licensed Signature — APS-21290P3 License #

DAN FELDMAN 08-20-2025
APS Printed name Date:

FIRETROL Protection Systems
FIRE PROTECTION AND LIFE SAFETY SPECIALISTS
SCR-0292 ACR-1751168
AUSTIN OFFICE
4616 W. Howard Lane Suite 700
Austin, Texas 78728
call (512) 687-0115 • fax (512) 687-0120
www.firetrol.net
Austin•Beaumont•Corpus Christi•Dallas•Fort Worth•Houston•La Porte•Lubbock•Mobile•Oklahoma City•Phoenix
Salt Lake City•San Antonio•Tucson•Tampa•Tyler•Waco

PROJECT: THORNDALE HIGH SCHOOL
STADIUM DRIVE
THORNDALE, TX. 76577

CONTRACT WITH: CAPSTAR ELECTRIC
871 E UNIVERSITY AVE., STE 101
GEORGETOWN, TX. 78626

NEW GROUND UP CONSTRUCTION

DRAWING TITLE: FIRE ALARM SYSTEM

CONTRACT NUMBER: 47-005212	PERMIT NUMBER:
DATE: 8/18/2025	DRAWN BY: PAC
AHJ:	CHECKED BY: DF

Sheet Number
1 of 5

Sheet Name
FA 1.00
SYMBOL LEGEND AND DETAILS
FIRE ALARM SYSTEM



1 AREA A FIRE ALARM LAYOUT

0' 4' 8' 16'

1/8" = 1'-0"

DRAWING NOTES

1. MODULES TO MONITOR BDA SYSTEM. FIELD VERIFY LOCATION.
2. MODULES TO MONITOR FIRE SPRINKLER SYSTEM AND FIRE PUMP.
3. SURGE SUPPRESSORS FOR UNDERGROUND TO BLDG D. SLC AND SPEAKER.
4. RELAY TO SHUTDOWN SPEAKER SYSTEM ON ALARM.
5. MODULES TO MONITOR SPRINKLER PUMP TANK.

IMPORTANT

This drawing and the information and design application herein contained is the property of Firetrol Protection Systems, inc. and/or its subsidiaries and is loaned under the expressed conditions that the same be returned to Firetrol Protection Systems, Inc. upon request; all information herein contained shall be treated as secret and confidential; no reproduction of this drawing or any part thereof shall be made without the expressed written consent of Firetrol Protection Systems, Inc.

REV.	REVISIONS	DATE
1		
2		
3		
4		
5		

☑ FOR SUBMITTAL ☐ RECORD DRAWINGS

I have reviewed these plans and ☑ certify that they comply with the applicable codes and standards.

Or

☐ certify they were copied from sealed engineering plans and any violations of the applicable codes or standards are specifically noted on these plans.

Firetrol Protection Systems, Inc.
4616 W. Howard Lane Suite 700
Austin, Texas 78728
Phone: 512-687-0115 ACR-1751168

APS Licensee Signature - APS-2129093 License #

DAN FELDMAN 08-20-2025
APS Printed name Date:

FIRETROL Protection Systems
FIRE PROTECTION AND LIFE SAFETY SPECIALISTS
SCR-0292 ACR-1751168
AUSTIN OFFICE
4616 W. Howard Lane Suite 700
Austin, Texas 78728
call (512) 687-0115 • fax (512) 687-0120
www.firetrol.net
Austin•Beaumont•Corpus Christi•Dallas•Fort Worth•Houston•La Porte•Lubbock•Mobile•Oklahoma City•Phoenix
Salt Lake City•San Antonio•Tucson•Tampa•Tyler•Waco

PROJECT: THORNDALE HIGH SCHOOL
STADIUM DRIVE
THORNDALE, TX. 76577

CONTRACT WITH: CAPSTAR ELECTRIC
871 E UNIVERSITY AVE., STE 101
GEORGETOWN, TX. 78626

DRAWING TITLE: NEW GROUND UP CONSTRUCTION
FIRE ALARM SYSTEM


CONTRACT NUMBER:	PERMIT NUMBER:
47-005212	
DATE: 8/18/2025	DRAWN BY: PAC
AHJ:	CHECKED BY: DF

Sheet Number
2 of 5

Sheet Name
FA 1.01
AREA A
FIRE ALARM SYSTEM

DRAWING NOTES

1. MODULES TO MONITOR BDA SYSTEM. FIELD VERIFY LOCATION.
2. MODULES TO MONITOR FIRE SPRINKLER SYSTEM AND FIRE PUMP.
3. SURGE SUPPRESSORS FOR UNDERGROUND TO BLDG D. SLC AND SPEAKER.
4. RELAY TO SHUTDOWN SPEAKER SYSTEM ON ALARM.
5. MODULES TO MONITOR SPRINKLER PUMP TANK.

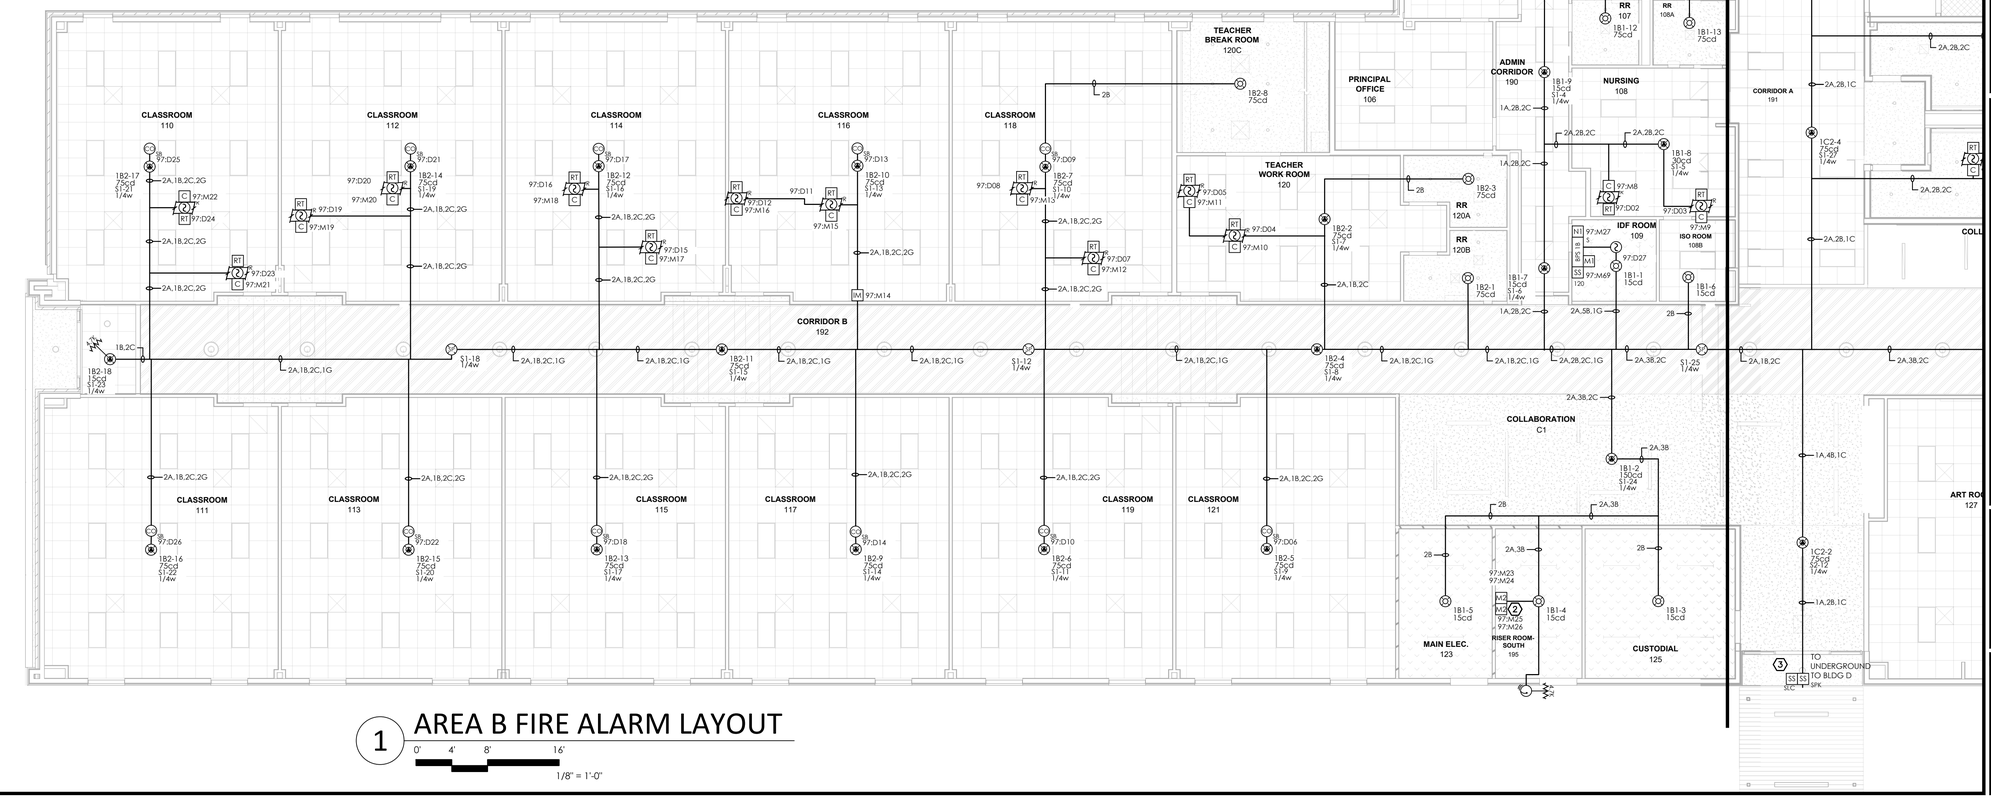

1 AREA B FIRE ALARM LAYOUT

0' 4' 8' 16'

1/8" = 1'-0"

IMPORTANT

This drawing and the information and design application herein contained is the property of Firetrol Protection Systems, inc. and/or its subsidiaries and is loaned under the expressed conditions that the same be returned to Firetrol Protection Systems, Inc. upon request; all information herein contained shall be treated as secret and confidential; no reproduction of this drawing or any part thereof shall be made without the expressed written consent of Firetrol Protection Systems, Inc.

REV.	REVISIONS	DATE
1		
2		
3		
4		
5		

☑ FOR SUBMITTAL ☐ RECORD DRAWINGS

I have reviewed these plans and

☑ certify that they comply with the applicable codes and standards.

Or

☐ certify they were copied from sealed engineering plans and any violations of the applicable codes or standards are specifically noted on these plans.

Firetrol Protection Systems, Inc.
4616 W. Howard Lane Suite 700
Austin, Texas 78728
Phone: 512-687-0115 ACR-1751168

APS Licensee Signature - APS-21290P3 License #

DAN FELDMAN 08-20-2025
APS Printed name Date:

FIRETROL Protection Systems
FIRE PROTECTION AND LIFE SAFETY SPECIALISTS
SCR-0292 ACR-1751168
AUSTIN OFFICE
4616 W. Howard Lane Suite 700
Austin, Texas 78728
call (512) 687-0115 • fax (512) 687-0120
www.firetrol.net
Austin•Beaumont•Corpus Christi•Dallas•Fort Worth•Houston•La Porte•Lubbock•Mobile•Oklahoma City•Phoenix
Salt Lake City•San Antonio•Tucson•Tampa•Tyler•Waco

PROJECT: THORNDALE HIGH SCHOOL
STADIUM DRIVE
THORNDALE, TX. 76577

CONTRACT WITH: CAPSTAR ELECTRIC
871 E UNIVERSITY AVE., STE 101
GEORGETOWN, TX. 78626


DRAWING TITLE: FIRE ALARM SYSTEM

NEW GROUND UP CONSTRUCTION

CONTRACT NUMBER: 47-005212	PERMIT NUMBER:
DATE: 8/18/2025	DRAWN BY: PAC
AHJ:	CHECKED BY: DF

Sheet Number
3 of 5

Sheet Name
FA 1.02
AREA B
FIRE ALARM SYSTEM

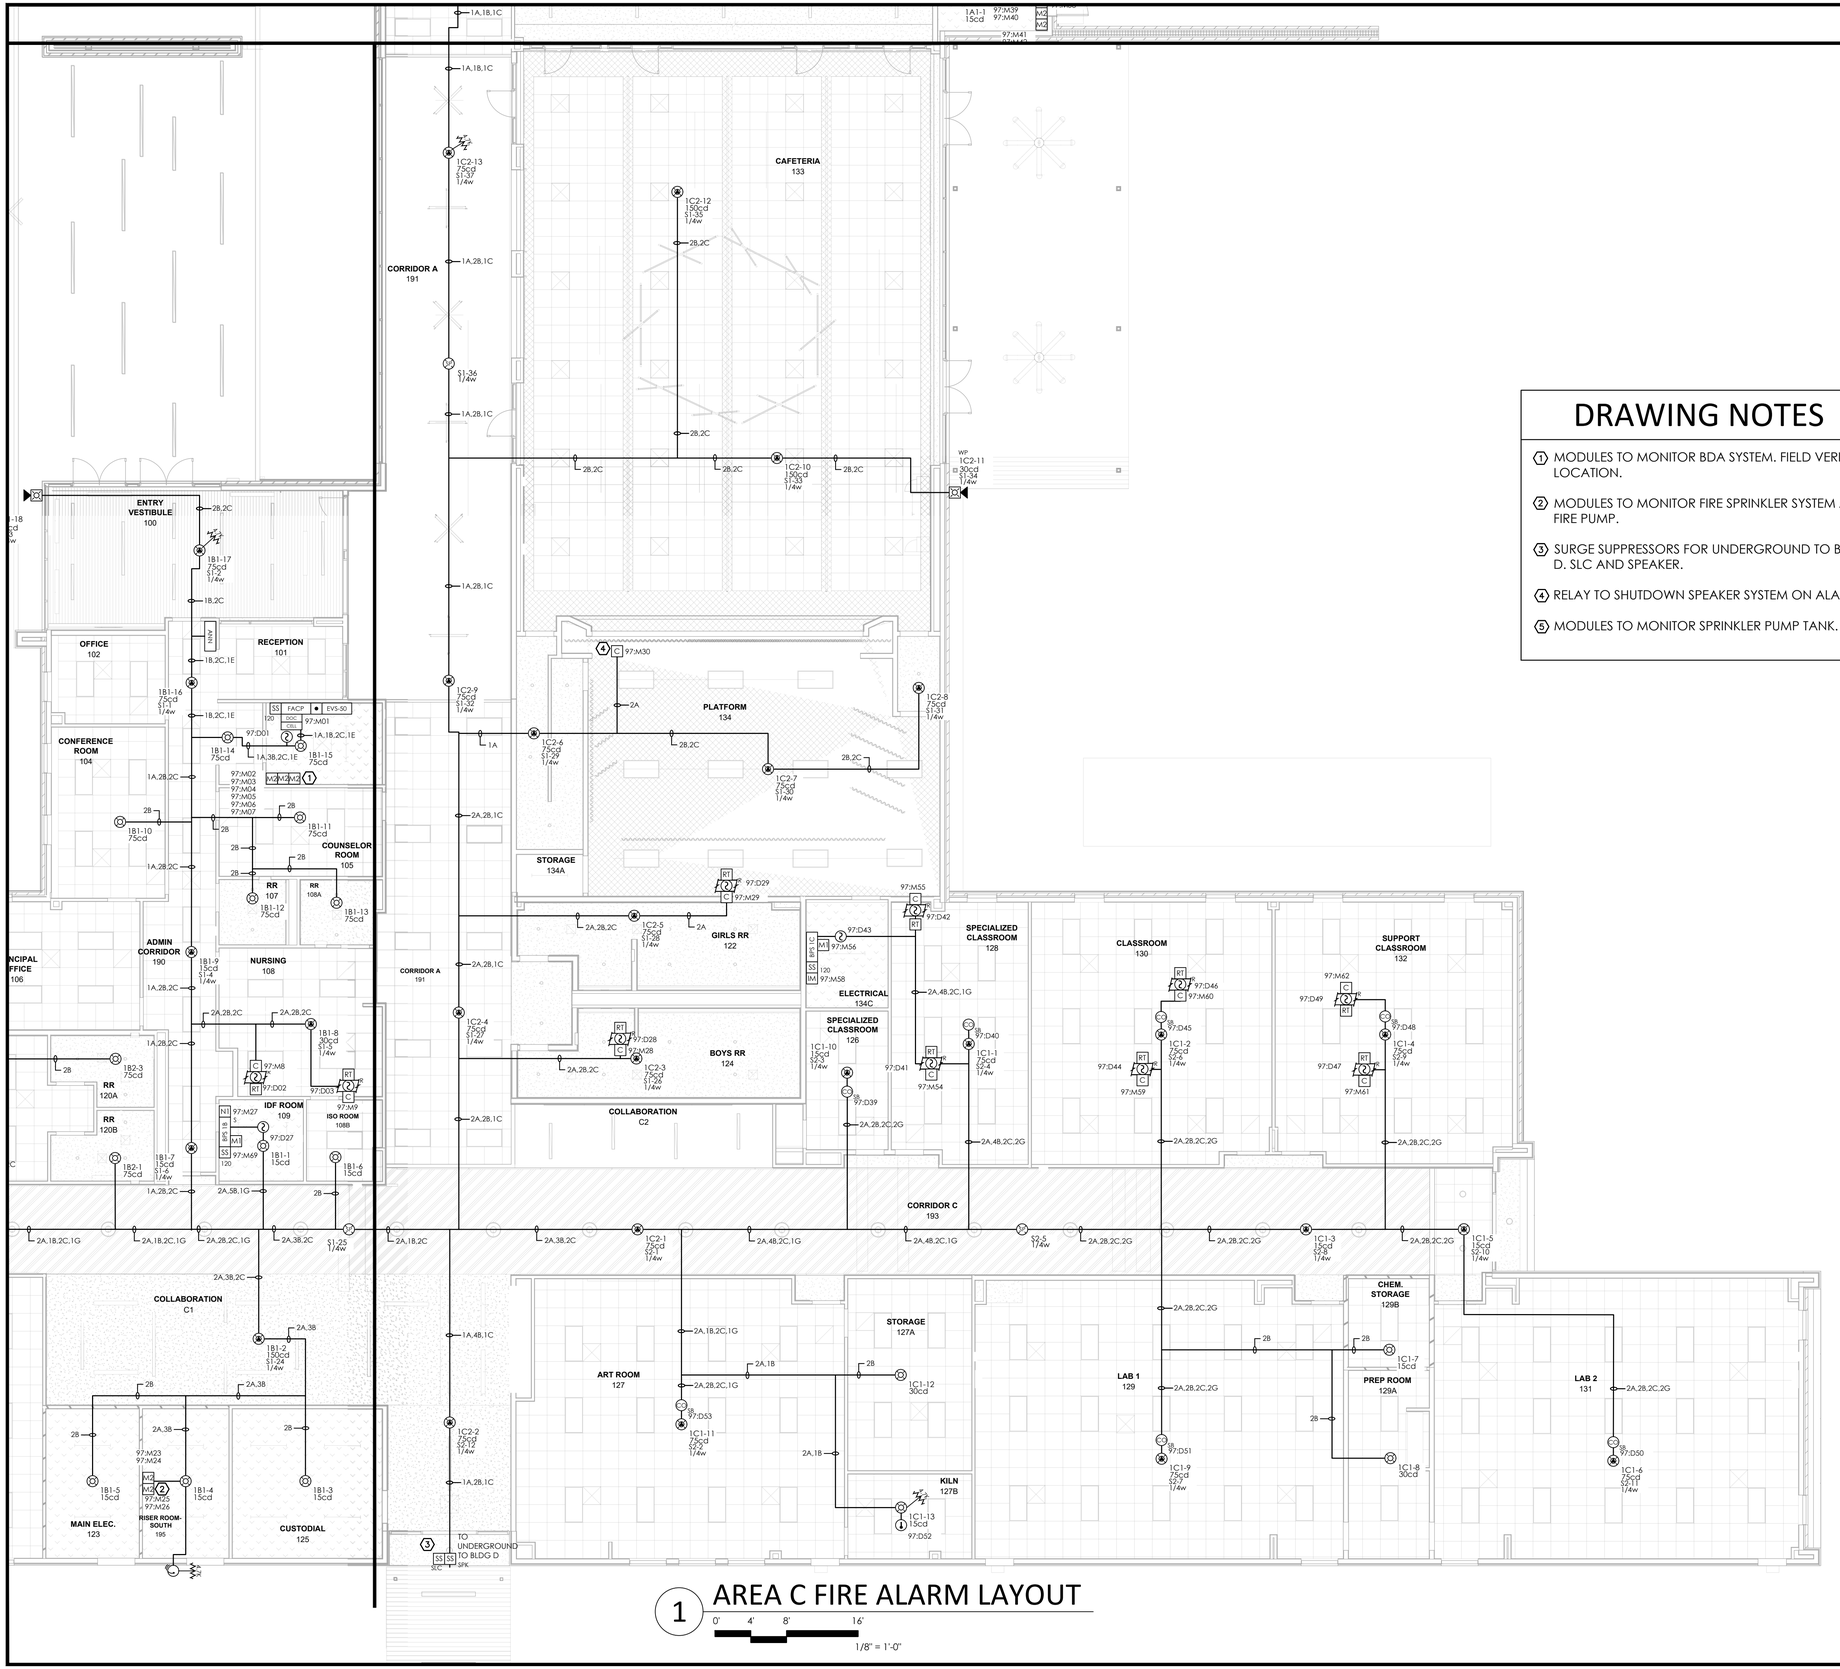

1 AREA C FIRE ALARM LAYOUT

0' 4' 8' 16'

1/8" = 1'-0"

DRAWING NOTES

1. MODULES TO MONITOR BDA SYSTEM. FIELD VERIFY LOCATION.
2. MODULES TO MONITOR FIRE SPRINKLER SYSTEM AND FIRE PUMP.
3. SURGE SUPPRESSORS FOR UNDERGROUND TO BLDG D. SLC AND SPEAKER.
4. RELAY TO SHUTDOWN SPEAKER SYSTEM ON ALARM.
5. MODULES TO MONITOR SPRINKLER PUMP TANK.

IMPORTANT

This drawing and the information and design application herein contained is the property of Firetrol Protection Systems, inc. and/or its subsidiaries and is loaned under the expressed conditions that the same be returned to Firetrol Protection Systems, Inc. upon request; all information herein contained shall be treated as secret and confidential; no reproduction of this drawing or any part thereof shall be made without the expressed written consent of Firetrol Protection Systems, Inc.

REV.	REVISIONS	DATE
1		
2		
3		
4		
5		

☑ FOR SUBMITTAL ☐ RECORD DRAWINGS

I have reviewed these plans and

☑ certify that they comply with the applicable codes and standards.

Or

☐ certify they were copied from sealed engineering plans and any violations of the applicable codes or standards are specifically noted on these plans.

Firetrol Protection Systems, Inc.
4616 W. Howard Lane Suite 700
Austin, Texas 78728
Phone: 512-687-0115 ACR-1751168

APS Licensee Signature — APS-21290P3 License #

DAN FELDMAN — 08-20-2025
APS Printed name — Date:

FIRETROL Protection Systems
FIRE PROTECTION AND LIFE SAFETY SPECIALISTS
SCR-0292 ACR-1751168
AUSTIN OFFICE
4616 W. Howard Lane Suite 700
Austin, Texas 78728
call (512) 687-0115 • fax (512) 687-0120
www.firetrol.net
Austin • Beaumont • Corpus Christi • Dallas • Fort Worth • Houston • La Porte • Lubbock • Mobile • Oklahoma City • Phoenix
Salt Lake City • San Antonio • Tucson • Tempe • Tyler • Waco

PROJECT: THORNDALE HIGH SCHOOL
STADIUM DRIVE
THORNDALE, TX, 76577

CONTRACT WITH: CAPSTAR ELECTRIC
871 E UNIVERSITY AVE, STE 101
GEORGETOWN, TX, 78626

DRAWING TITLE: NEW GROUND UP CONSTRUCTION
FIRE ALARM SYSTEM


CONTRACT NUMBER:	PERMIT NUMBER:
47-005212	
DATE: 8/18/2025	DRAWN BY: PAC
AHJ:	CHECKED BY: DF

Sheet Number
4 of 5

Sheet Name
FA 1.03
AREA C
FIRE ALARM SYSTEM

DRAWING NOTES


1. MODULES TO MONITOR BDA SYSTEM. FIELD VERIFY LOCATION.
2. MODULES TO MONITOR FIRE SPRINKLER SYSTEM AND FIRE PUMP.
3. SURGE SUPPRESSORS FOR UNDERGROUND TO BLDG D. SLC AND SPEAKER.
4. RELAY TO SHUTDOWN SPEAKER SYSTEM ON ALARM.
5. MODULES TO MONITOR SPRINKLER PUMP TANK.

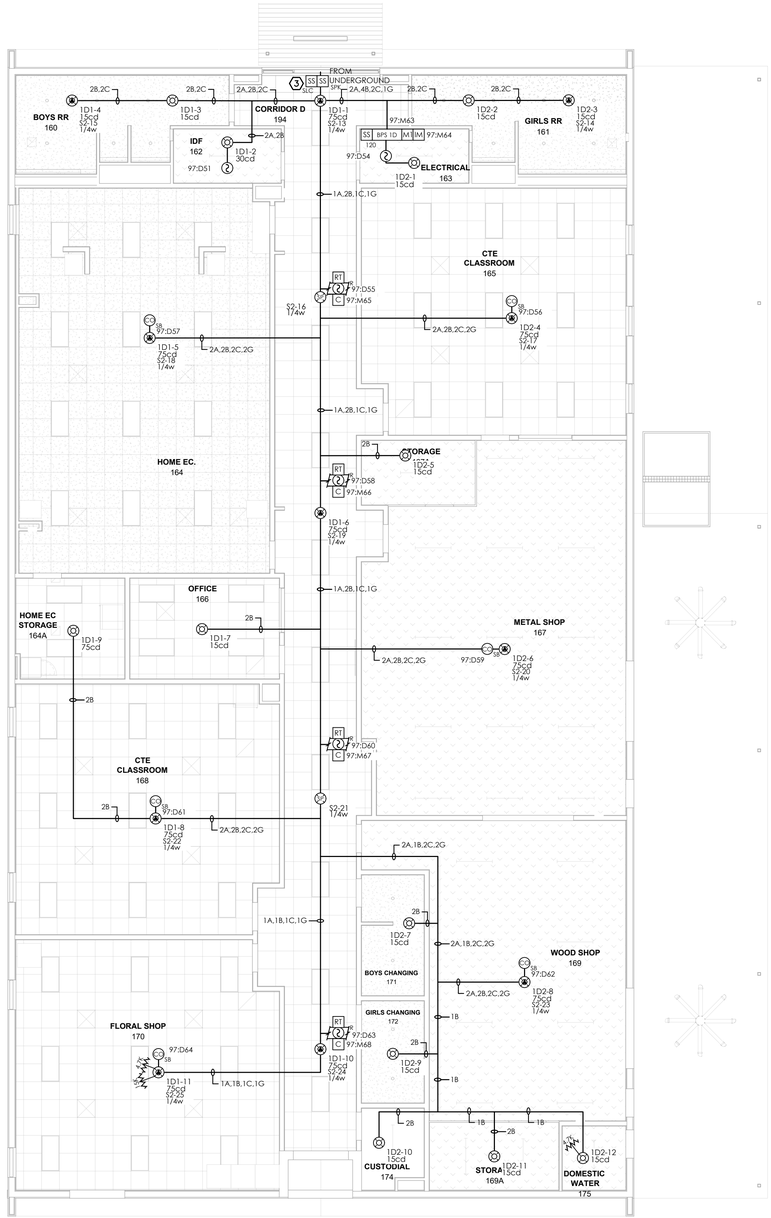

1 AREA D FIRE ALARM LAYOUT

0' 4' 8' 16'

1/8" = 1'-0"

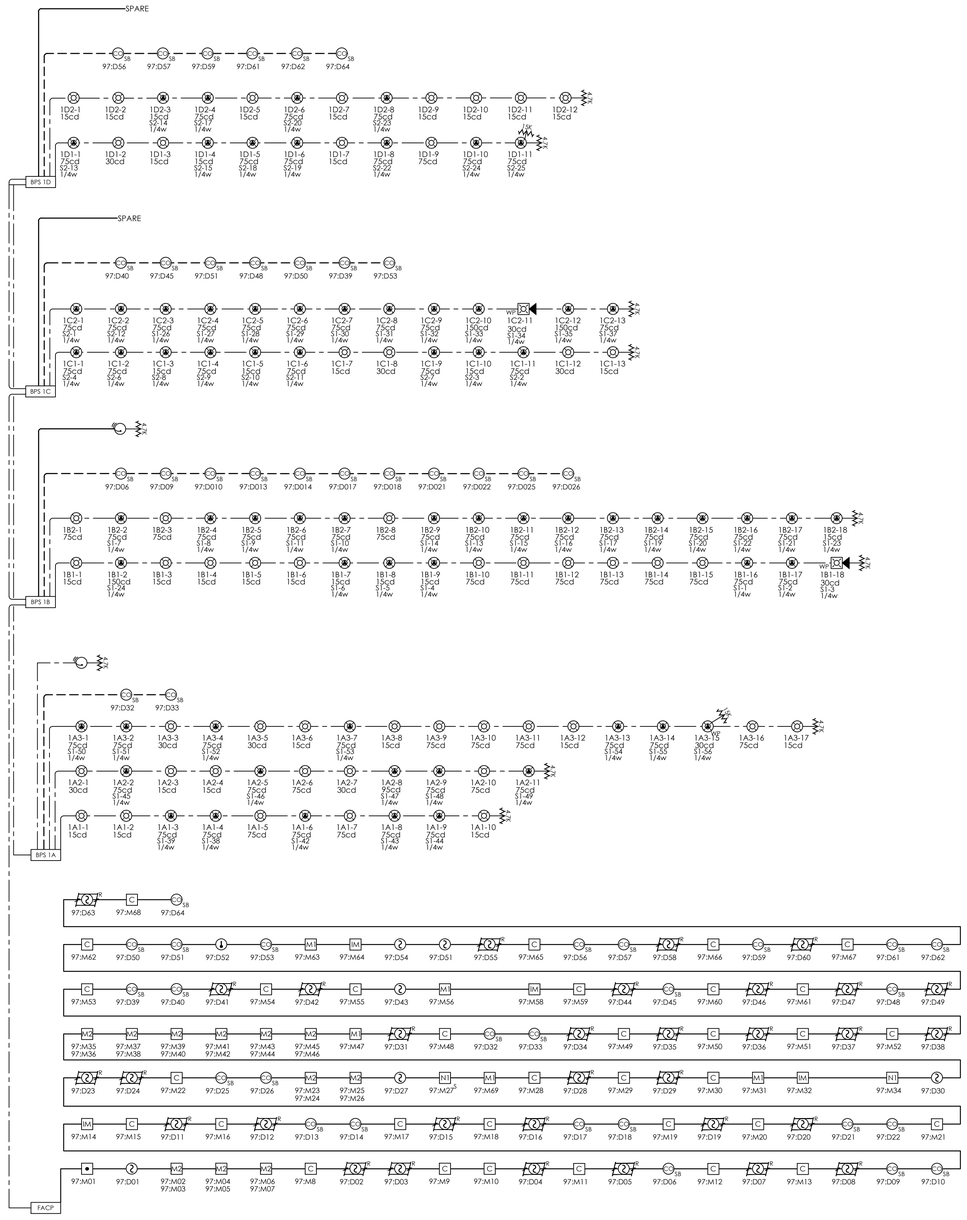

2 FIRE ALARM RISER DIAGRAMS

N.T.S.

IMPORTANT

This drawing and the information and design application herein contained is the property of Firetrol Protection Systems, inc. and/or its subsidiaries and is loaned under the expressed conditions that the same be returned to Firetrol Protection Systems, Inc. upon request; all information herein contained shall be treated as secret and confidential; no reproduction of this drawing or any part thereof shall be made without the expressed written consent of Firetrol Protection Systems, Inc.

REV.	REVISIONS	DATE
1		
2		
3		
4		
5		

☑ FOR SUBMITTAL ☐ RECORD DRAWINGS

I have reviewed these plans and ☑ certify that they comply with the applicable codes and standards.

Or

☐ certify they were copied from sealed engineering plans and any violations of the applicable codes or standards are specifically noted on these plans.

Firetrol Protection Systems, Inc.
4616 W. Howard Lane Suite 700
Austin, Texas 78728
Phone: 512-687-0115 ACR-1751168

APS Licensee Signature - APS-2129093 License #

DAN FELDMAN 08-20-2025
APS Printed name Date:

FIRETROL Protection Systems
FIRE PROTECTION AND LIFE SAFETY SPECIALISTS
SCR-0292 ACR-1751168

AUSTIN OFFICE
4616 W. Howard Lane Suite 700
Austin, Texas 78728
call (512) 687-0115 • fax (512) 687-0120
www.firetrol.net

Austin•Beaumont•Corpus Christi•Dallas•Fort Worth•Houston•La Porte•Lubbock•Mobile•Oklahoma City•Phoenix
Salt Lake City•San Antonio•Tucson•Tampa•Upper Keller•Waco

PROJECT: THORNDALE HIGH SCHOOL
STADIUM DRIVE
THORNDALE, TX. 76577

CONTRACT WITH: CAPSTAR ELECTRIC
871 E UNIVERSITY AVE., STE 101
GEORGETOWN, TX. 78626

DRAWING TITLE: NEW GROUND UP CONSTRUCTION
FIRE ALARM SYSTEM

CONTRACT NUMBER: 47-005212	PERMIT NUMBER:
DATE: 8/18/2025	DRAWN BY: PAC
AHJ:	CHECKED BY: DF

Sheet Number
5 of 5

Sheet Name
FA 1.04
AREA D AND RISER
FIRE ALARM SYSTEM